
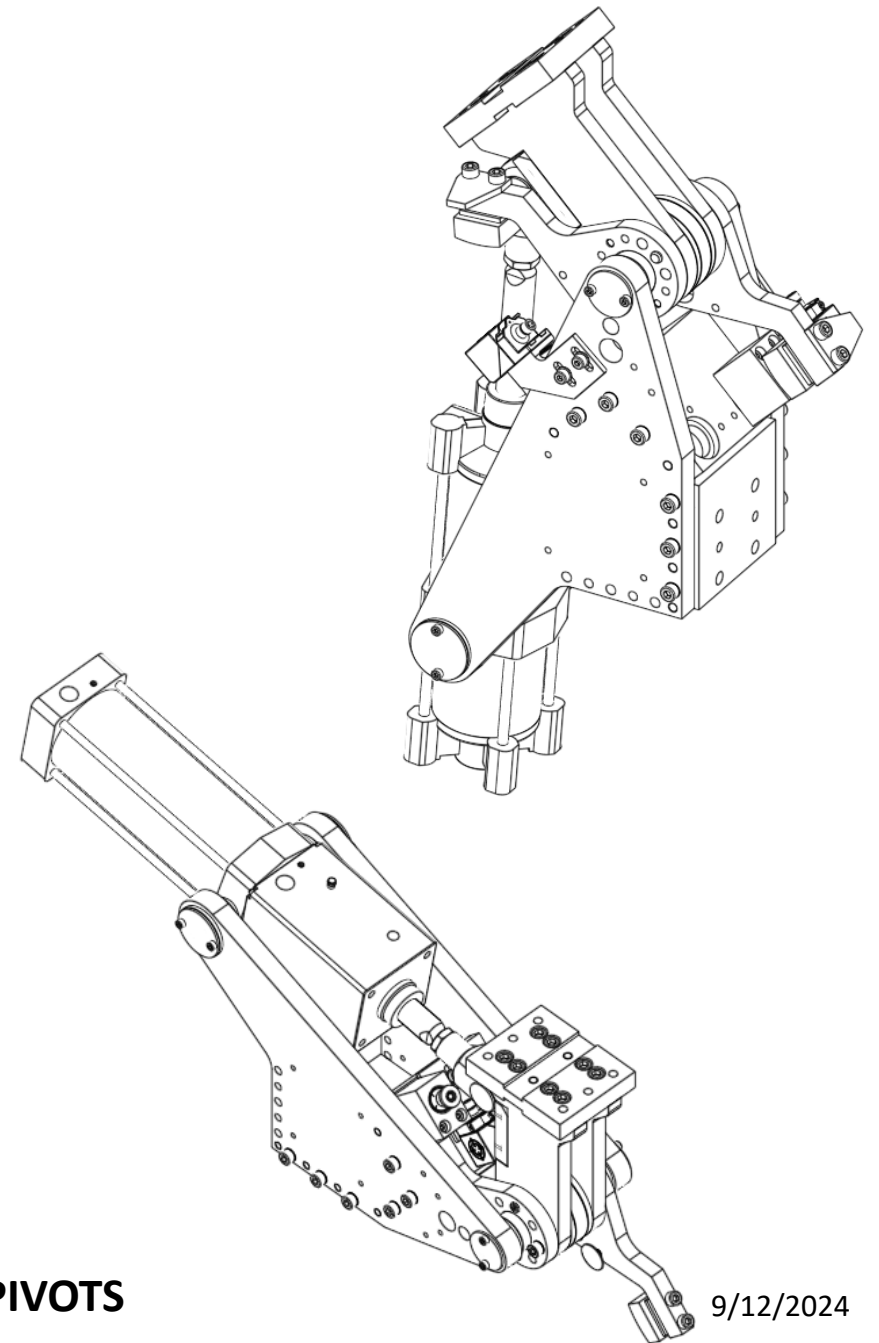
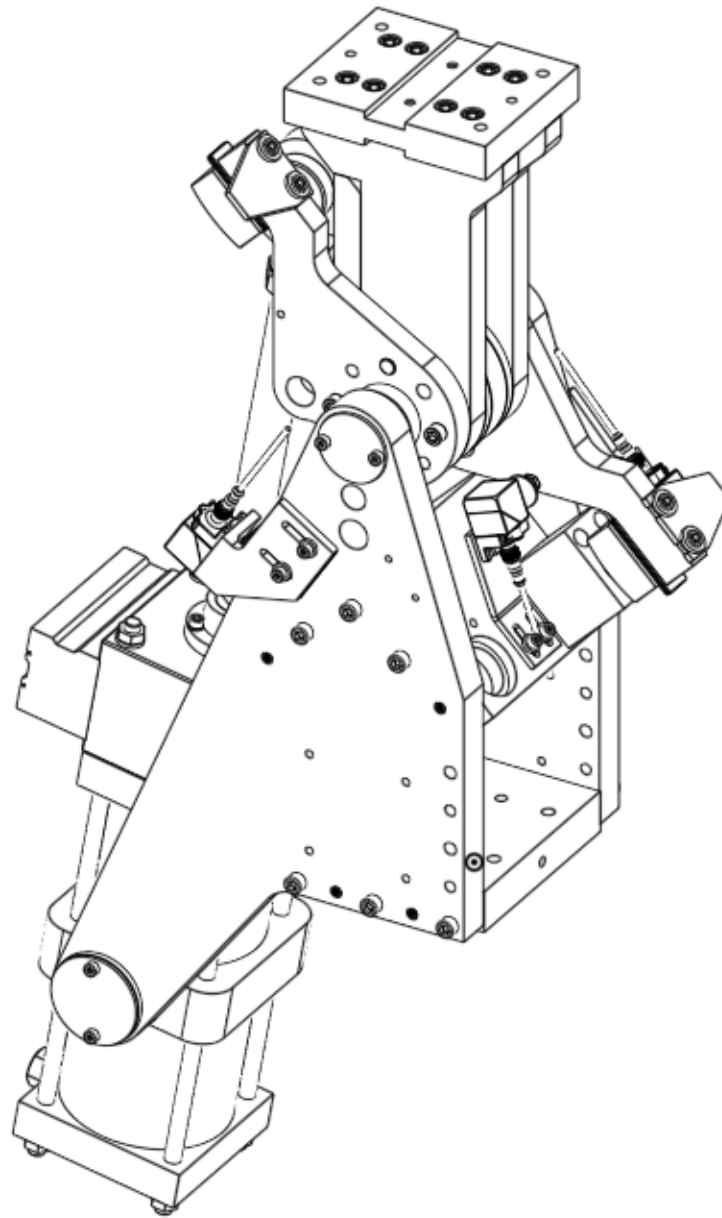


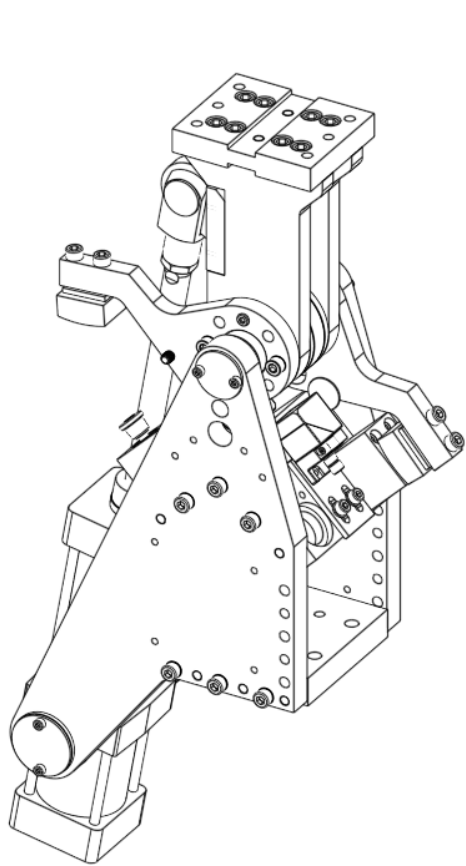

Ordering Information

TR100 - V - 90 - 6 - 1 - P - A - R - M

MODEL NUMBER

TR80, 80mm BORE
TR100, 100mm BORE
TR125, 125mm BORE
TR160, 160mm BORE

BODY MOUNT

HORIZONTAL H
VERTICAL V

OPENING ANGLE

15, 30, 45, 60, 75, 90

CONTACT TECH RIM FOR MORE OPENING ANGLE OPTIONS *

TOOLING MOUNT

BLADE MOUNT 4
HD SADDLE MOUNT 6

MIRROR ARMS

M SPECIFY FOR MIRROR/OPPOSITE STATIONS
LEAVE BLANK FOR STANDARD

RETRACTED WORK POSITION

R WORK POSITION WITH CYLINDER RETRACTED
LEAVE BLANK FOR STANDARD

SHOCKS

A ACE SHOCK (ML3325M)
E ENIDINE SHOCK (ECO OEM 1.15M)
H HEAVY DUTY (ACE, ML4525M)
* OPTION H FOR TR160 EXCLUSIVE

SENSOR

P CUBE SENSOR BRACKET, INTERNAL
PB BARREL SENSOR BRACKET, EXTERNAL
PC CUBE SENSOR BRACKET, EXTERNAL

CYLINDER

1 SMC, NPT
2 SMC, ISO G
3 CKD, NPT
4 CKD, ISO G
L ADD FOR LOCKING CYLINDER
B ADD FOR BOTTOM PORTS
EXAMPLE; 1L, 2L, 3L, 4L, 1LB, 2LB

A FEW EXAMPLES:


TR80-H-45-6-2-PC-A
TR100-V-90-6-1LB-PB-E-R-M
TR80-H-75-4-3-P-A

- TR125 and TR160 IS ONLY AVAILABLE WITH TOOLING MOUNT OPTION 6
- TR160 IS ONLY AVAILABLE WITH LOCKING CYLINDER
- TR160 IS ONLY AVAILABLE WITH OPTION H SHOCK




ORDERING STRING


9/12/2024

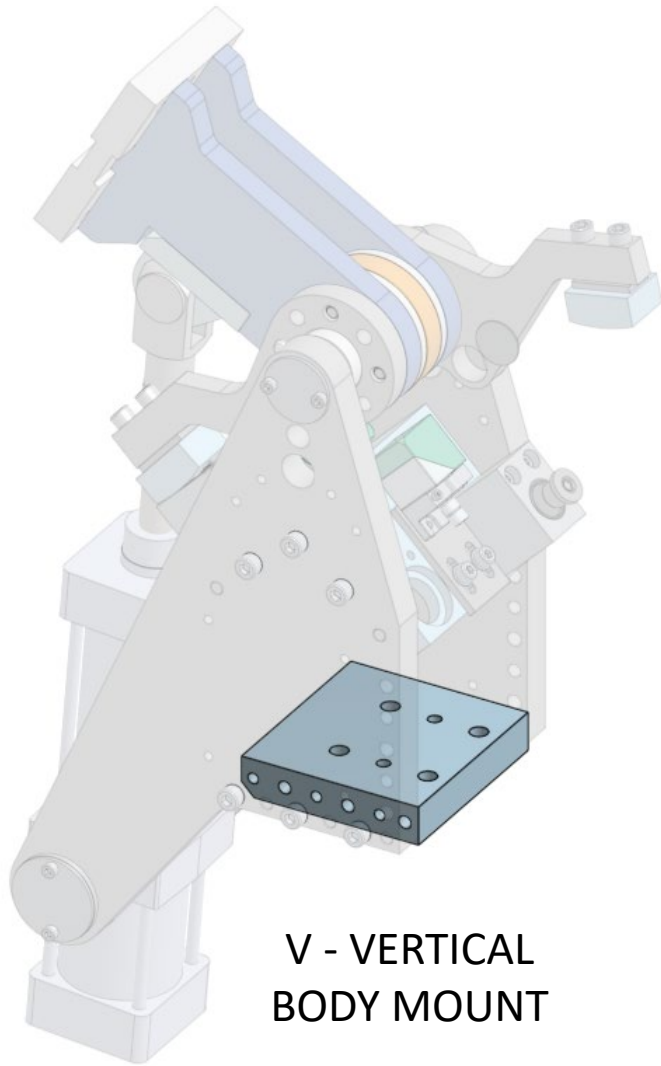

V - VERTICAL
BODY MOUNT

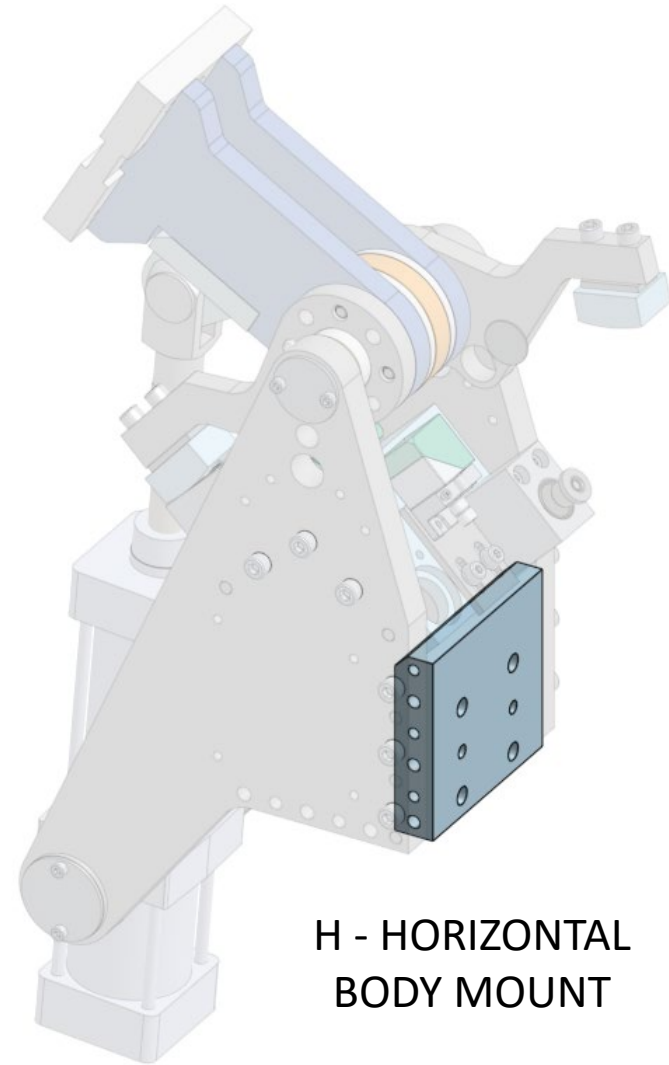



H - HORIZONTAL
BODY MOUNT

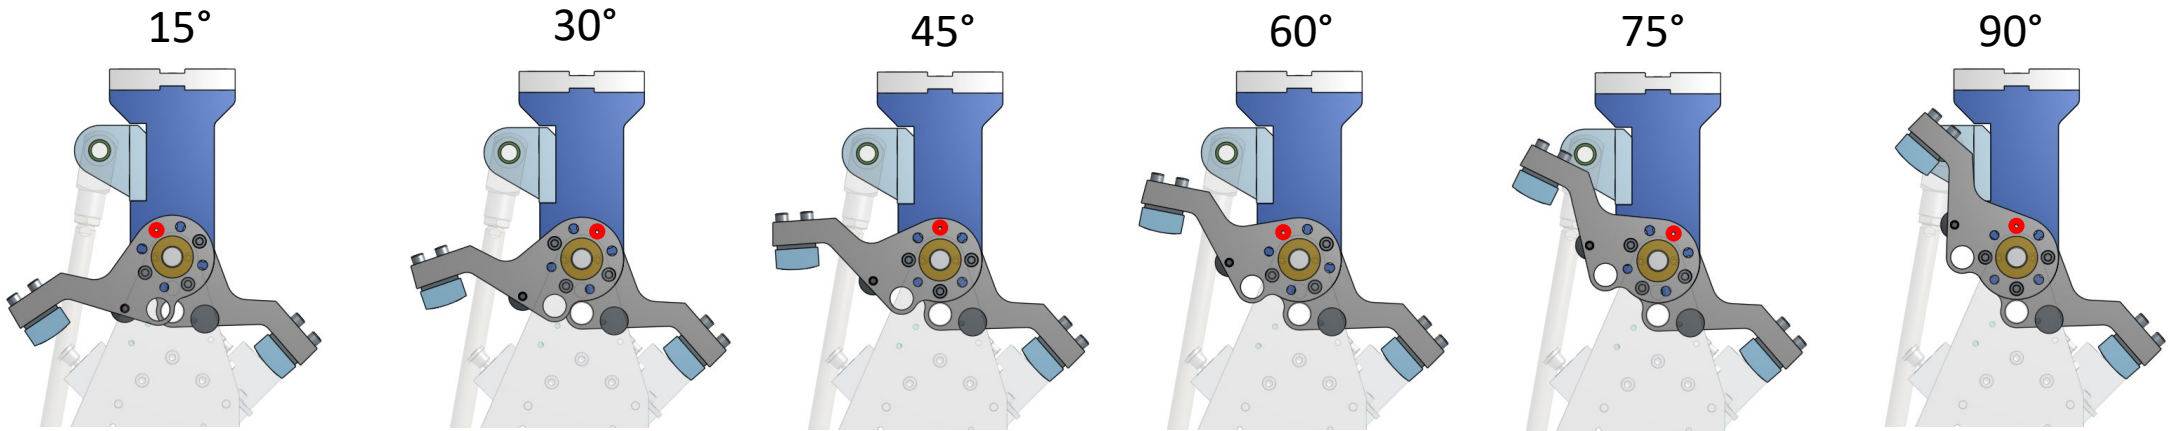


“STANDARD”

“-R RETRACTED”

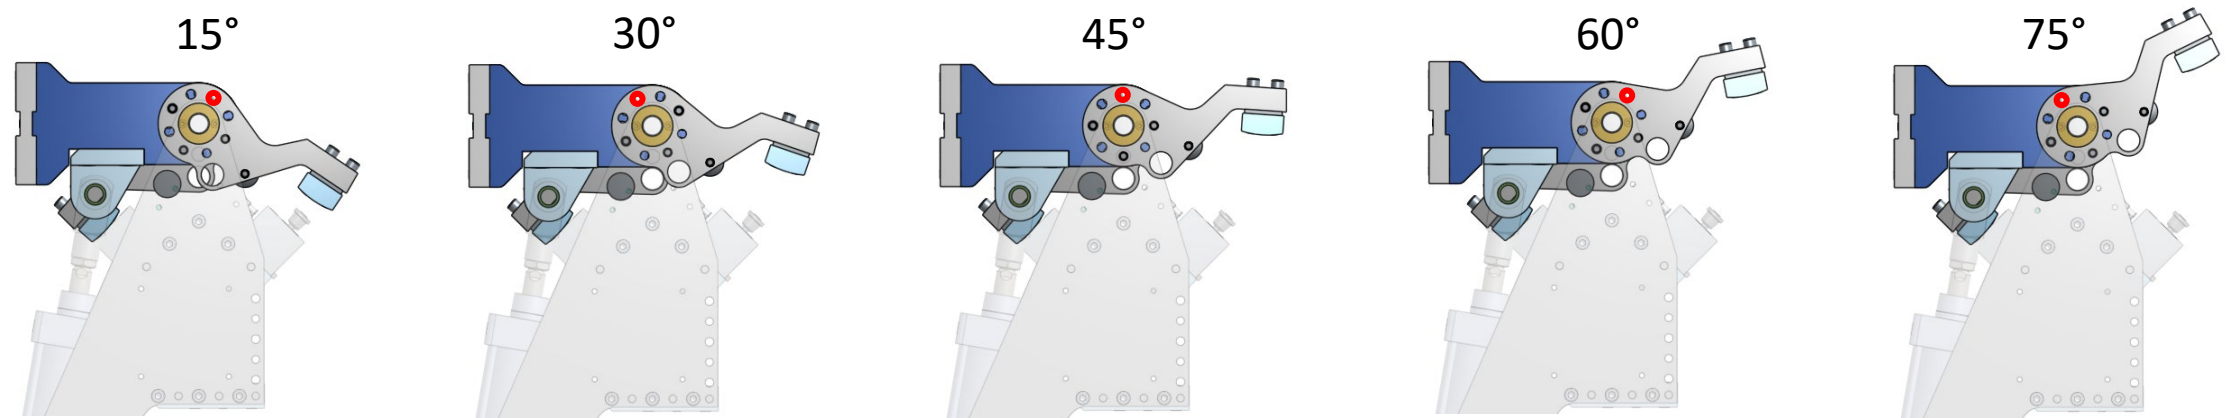

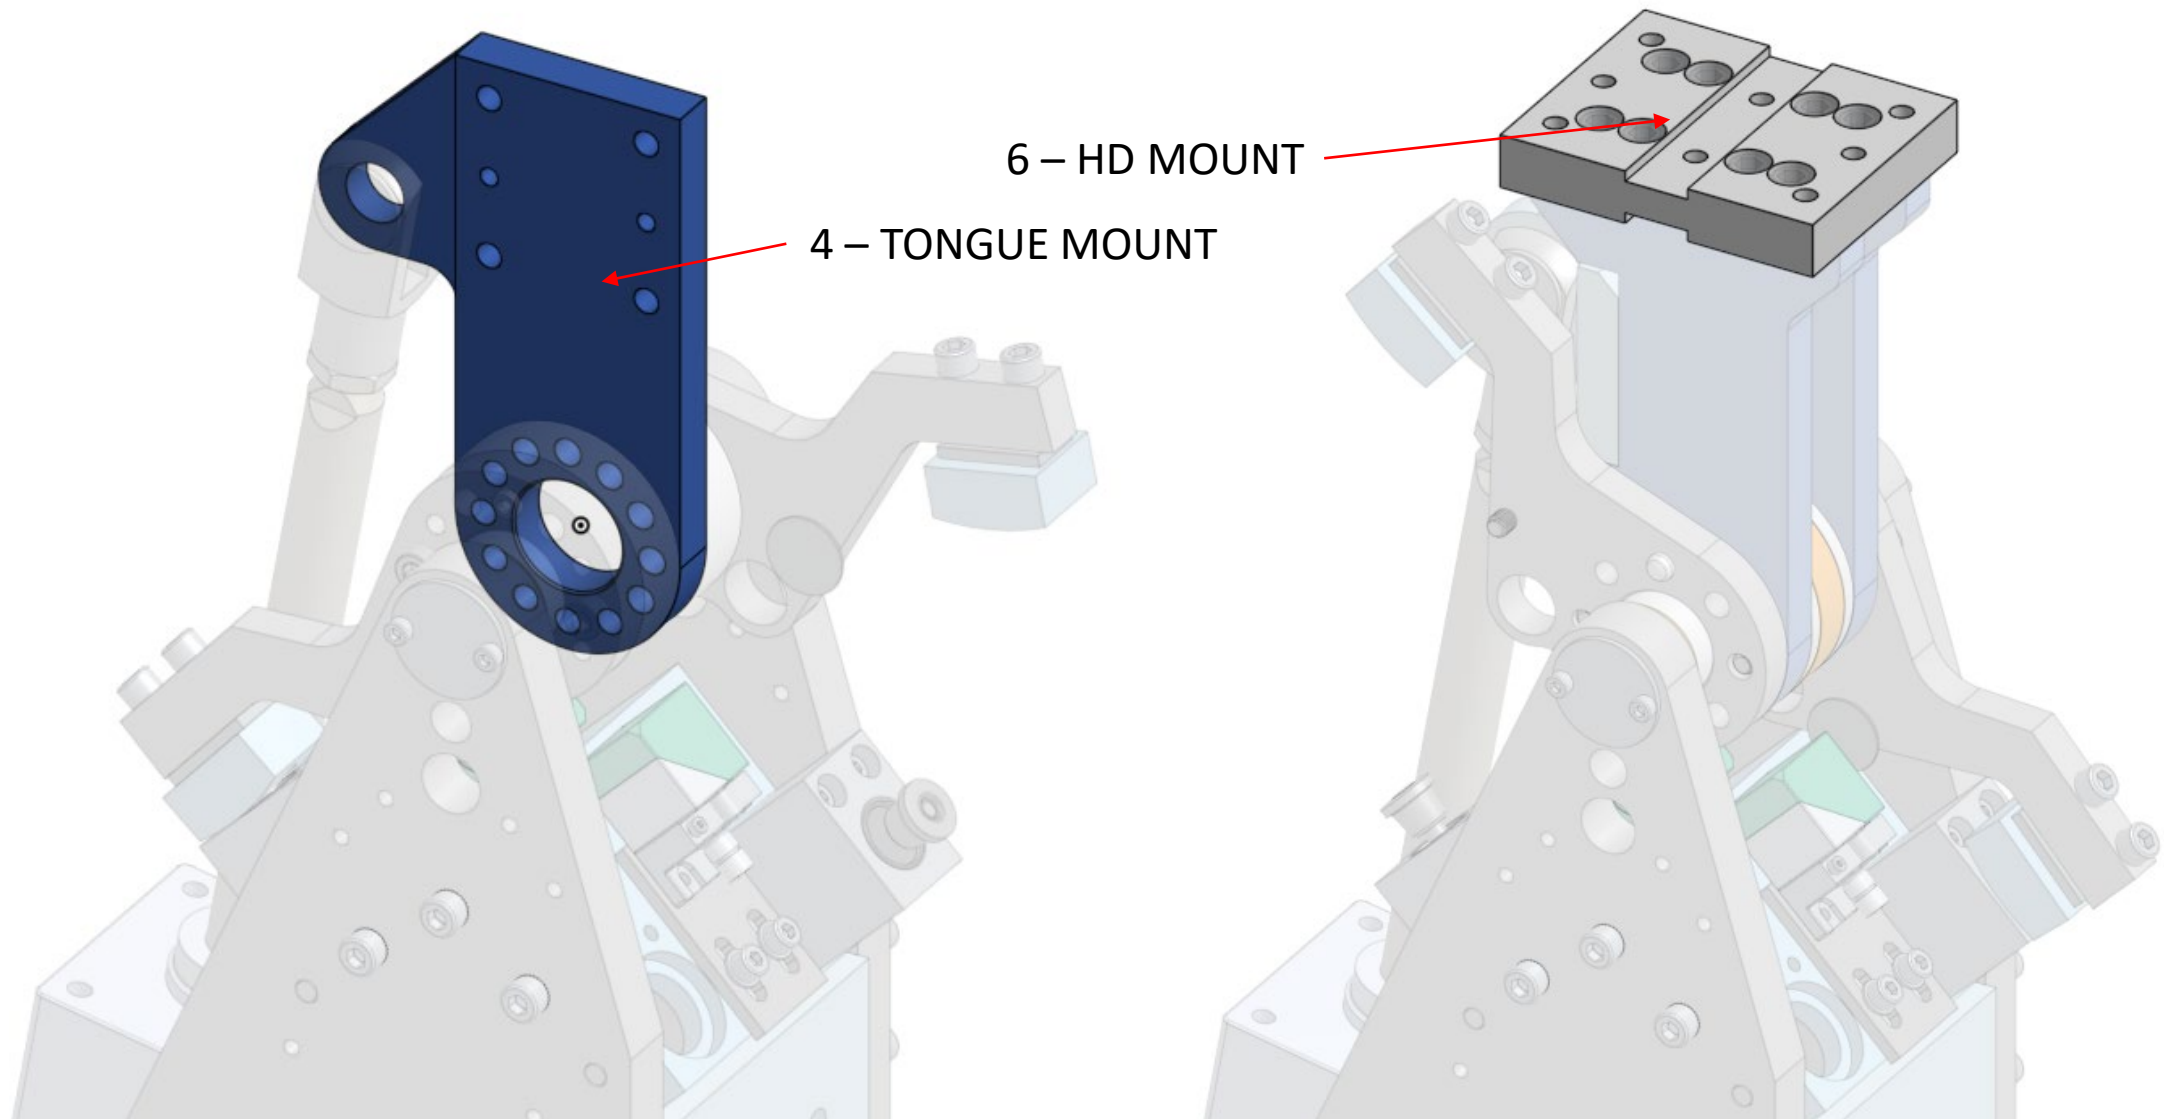


NON-LOCKING
NPT PORTS
OPTION SHOWN

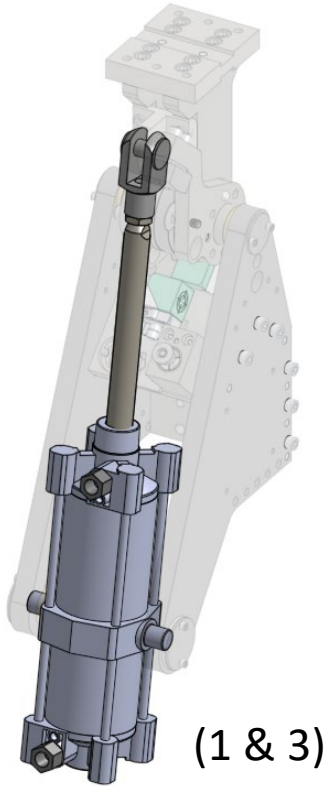


(1 & 3)

NON-LOCKING
ISO G PORTS
OPTION SHOWN

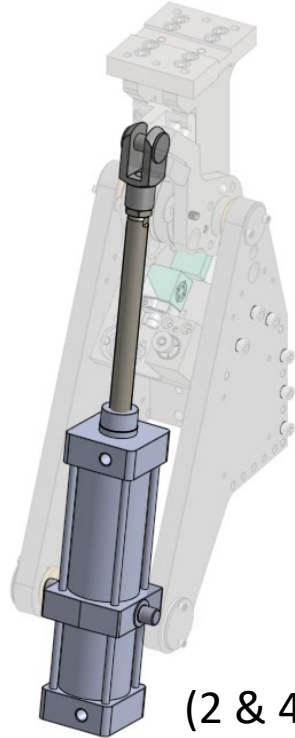


(2 & 4)

LOCKING
ISO G PORTS
OPTION SHOWN

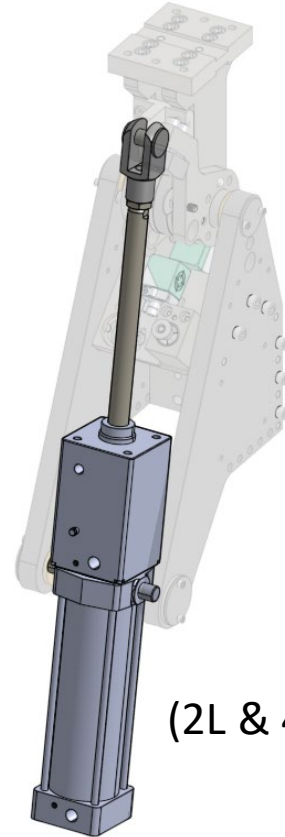


(2L & 4L)

LOCKING
BOTTOM AND NPT
OPTION SHOWN

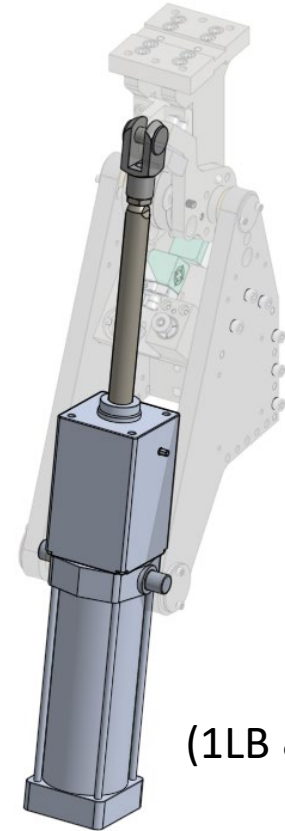


(1LB & 3LB)


For option B, ports face
in toward pivot unit

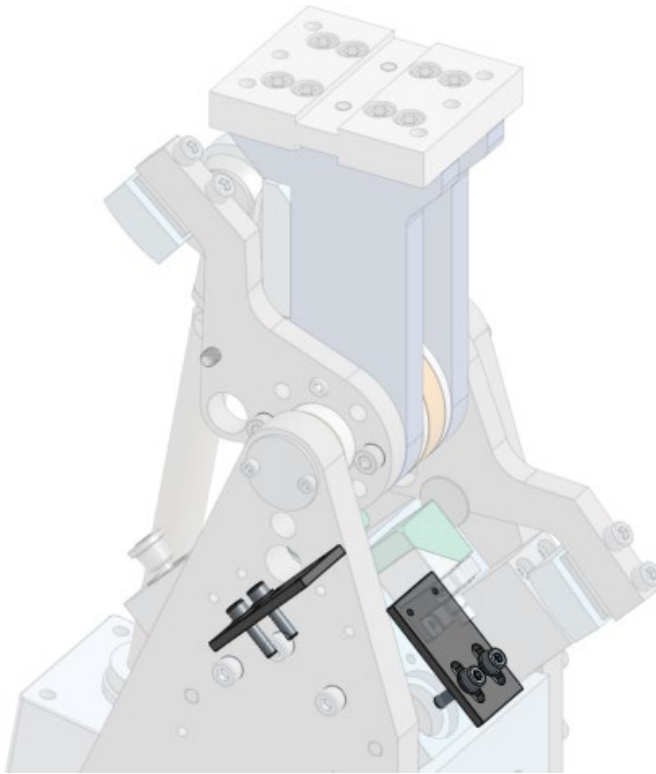

P, CUBE BRACKET, INBOARD
EXAMPLE PART NUMBER
TR100-H-90-6-1L-P-A

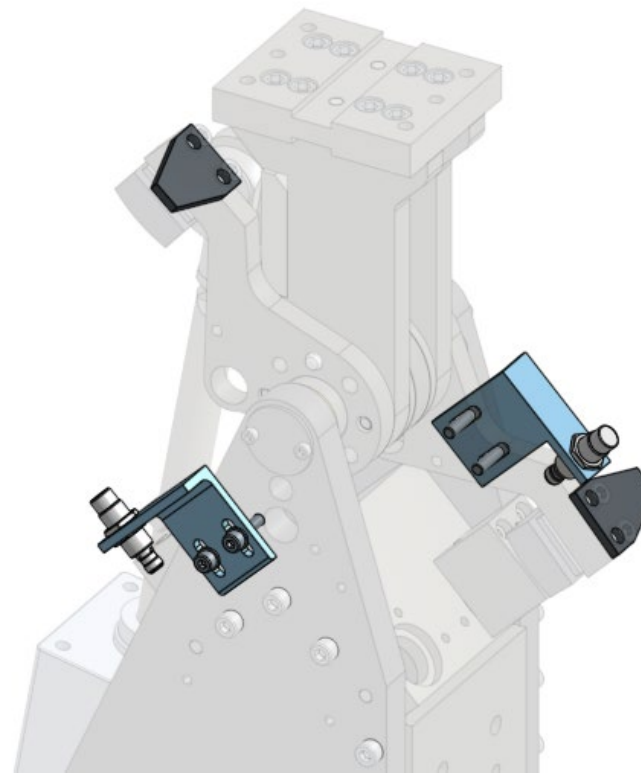


PB, BARREL BRACKET, OUTBOARD
EXAMPLE PART NUMBER
TR100-H-90-6-1L-PB-A

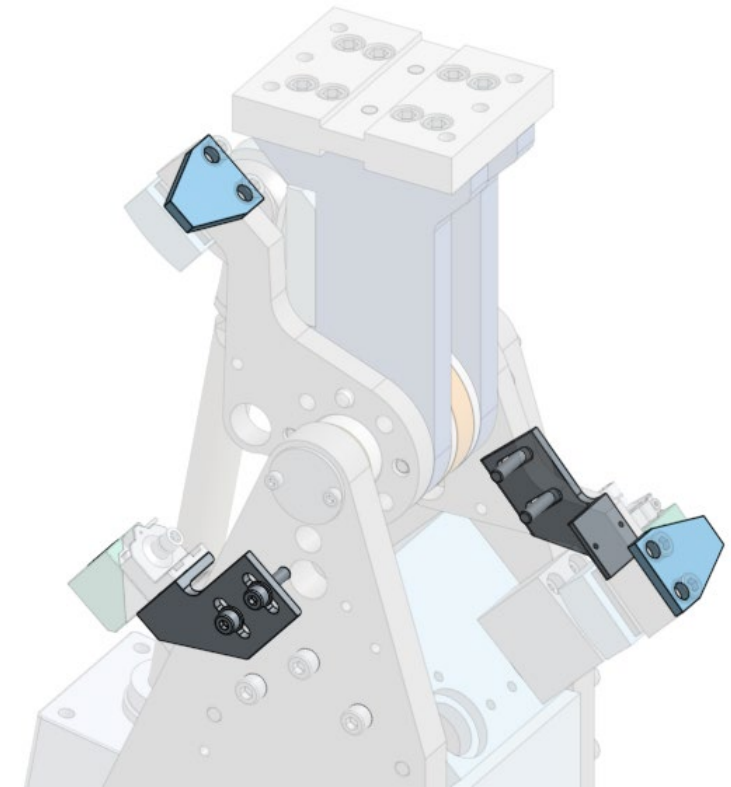


PC, CUBE BRACKET, OUTBOARD
EXAMPLE PART NUMBER
TR100-H-90-6-1L-PC-A


A - ACE (ML3325M)
E - ENIDINE (ECO OEM 1.15M)
H- HEAVY DUTY (ML4525M)

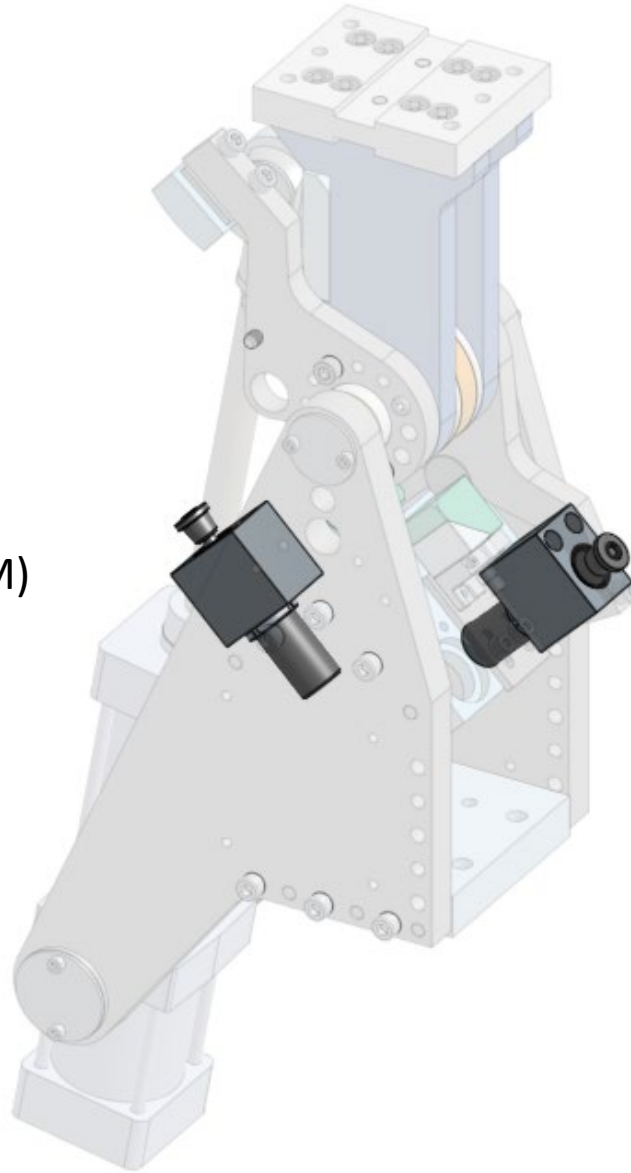

SHOCK OPTIONS

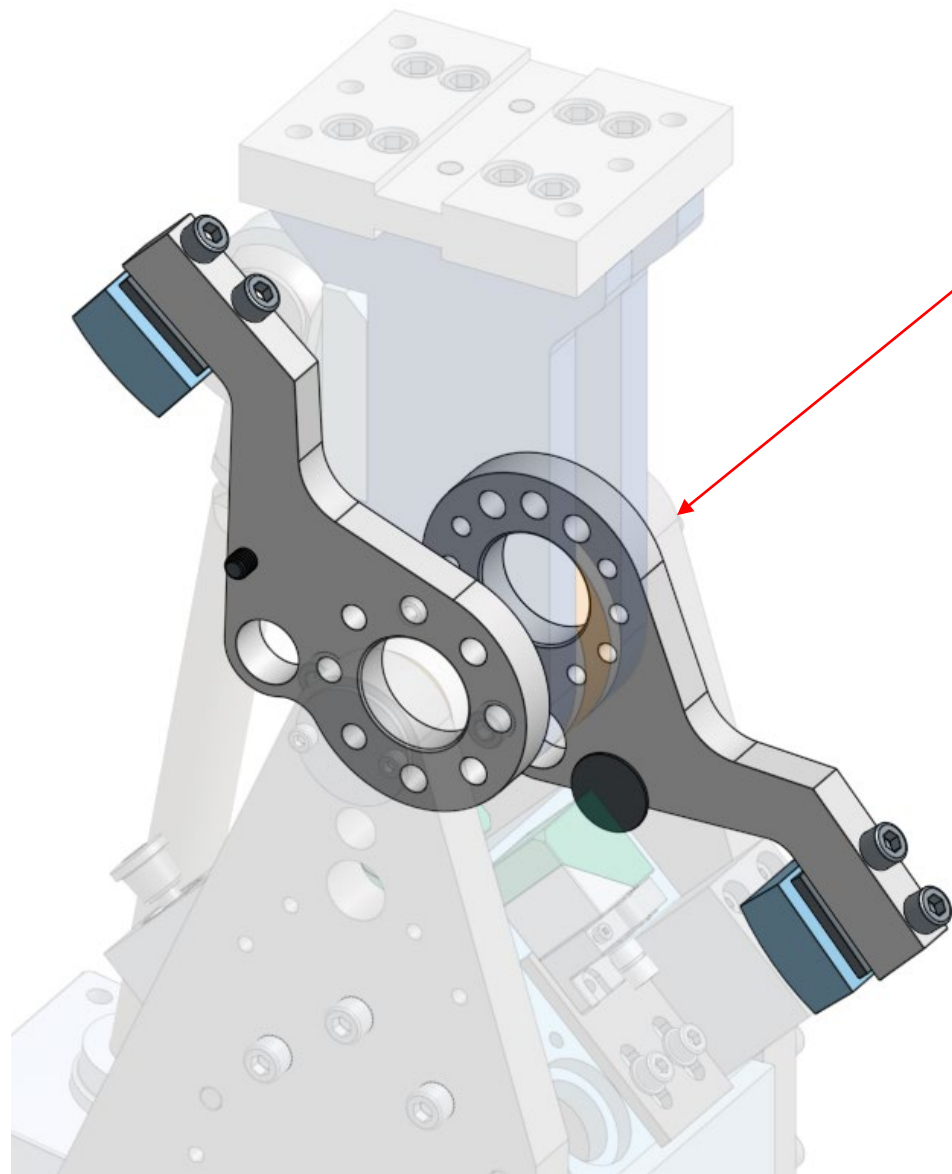


Standard

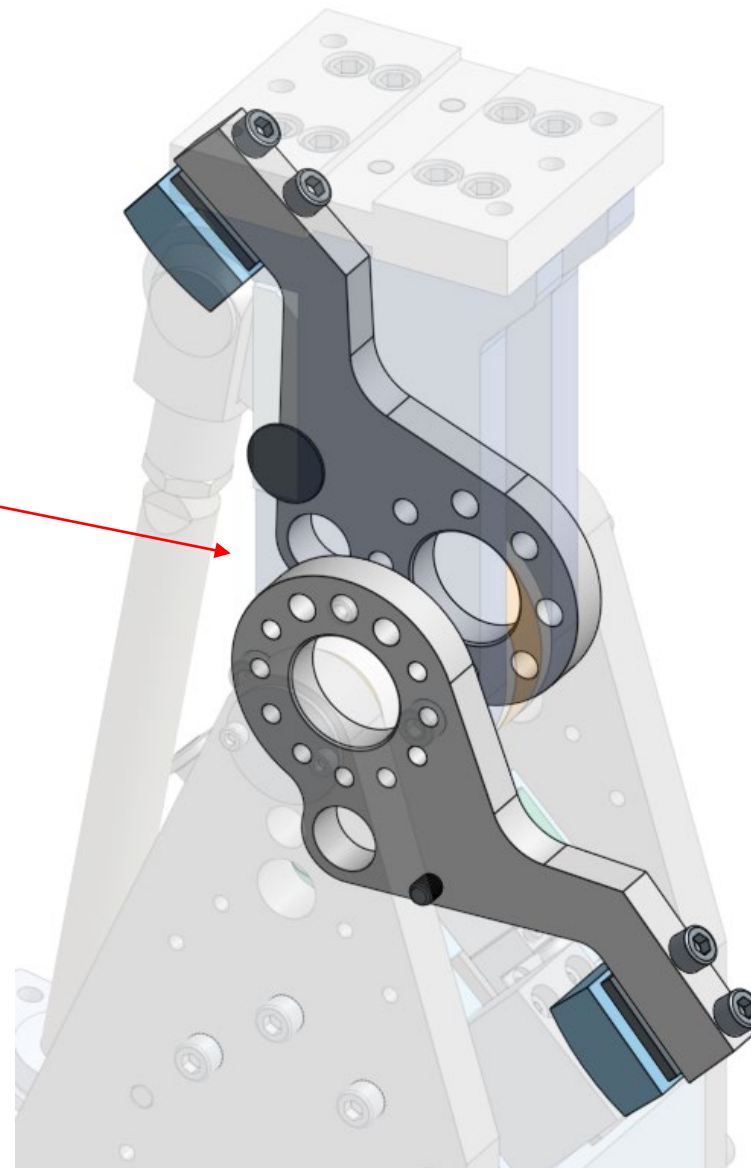

Mirrored


-R “RETRACTED” WORK POSITION
60 DEGREE OPENING SHOWN

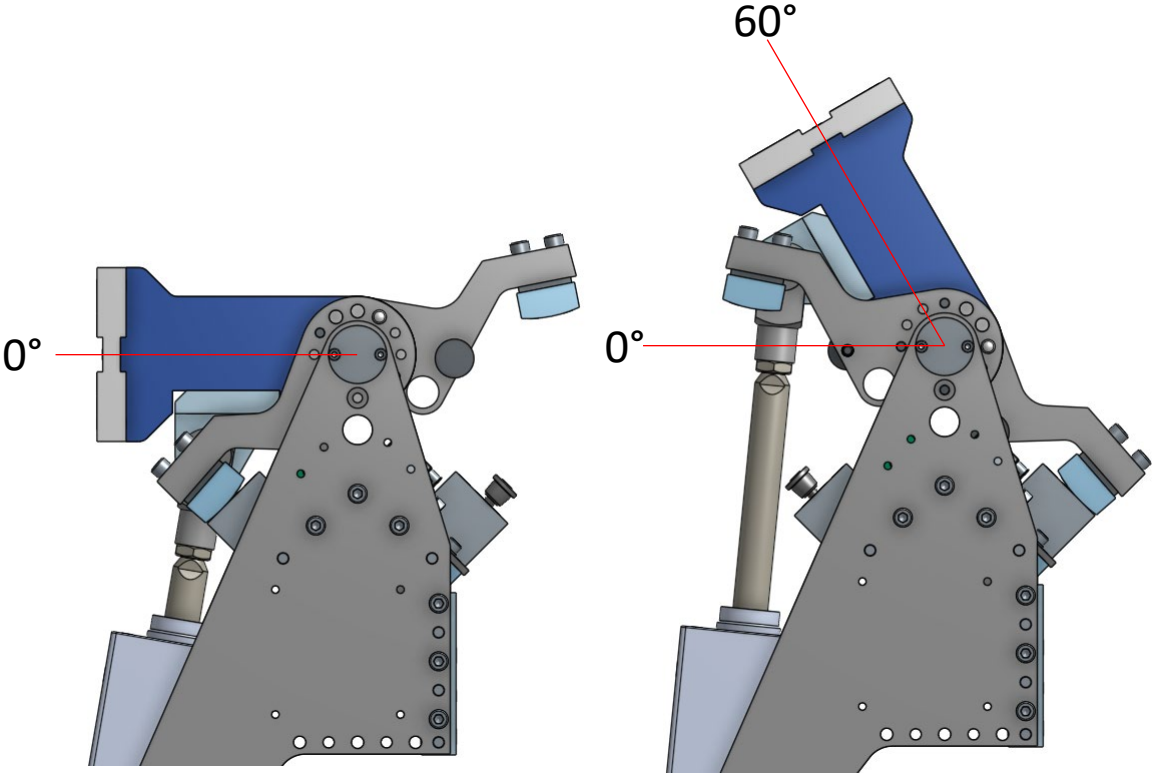

WORK / HOME POSITION
(CYL RETRACTED)

DUMPED POSITION
(CYL EXTENDED)

DEFAULT WORK POSITION
60 DEGREE OPENING SHOWN

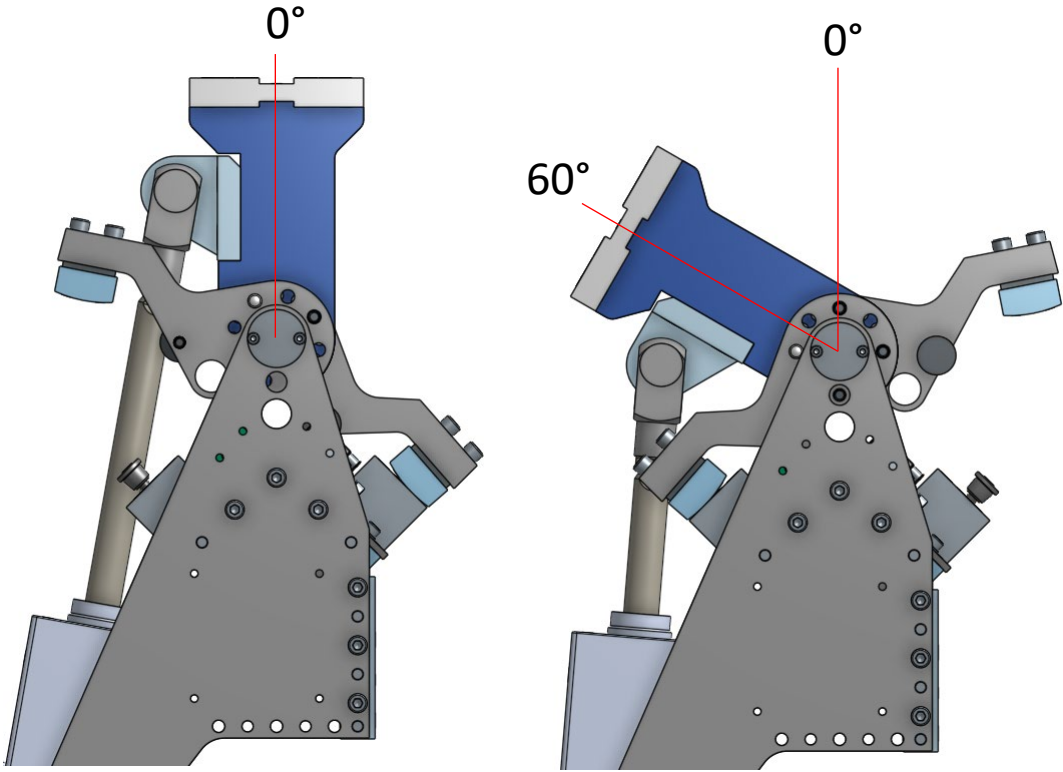

WORK / HOME POSITION
(CYL EXTENDED)

DUMPED POSITION
(CYL RETRACTED)